



# CSM Jumbo Depth Filter

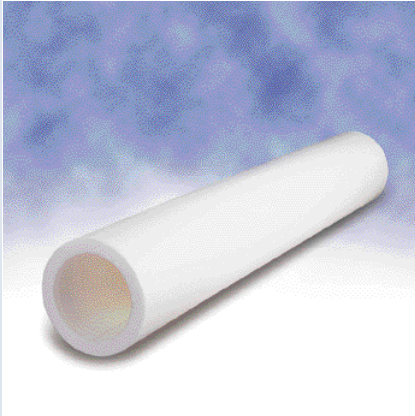

Liquid flow rate per 10 filter cartridge

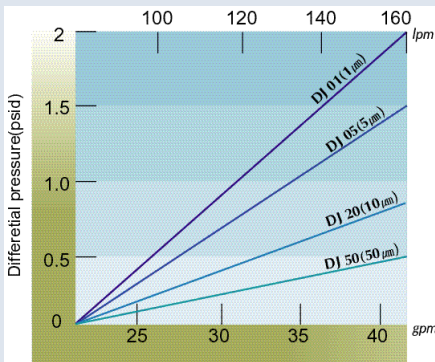

## Description

- CSM Jumbo Depth filter cartridge is constructed of polypropylene filter media.
- Thermal bonded micro-fiber construction offers no fiber release and consistent flow rates as well as superior filtration performance.
- High dirt holding capacity and excellent flow rates.
- Materials are FDA listed as acceptable for potable and edible.
- Available in a wide selection of micron ratings from 1 µm to 100µm

## Application

- DI Water, Chemical, Food & Beverage, Coating, Pre-filter

## Specification

### Material of Construction

- Media : Polypropylene microfiber 100%
- Core : Polypropylene

### Recommended Operating conditions

- Maximum Differential Pressure : 70psi(4.8 bar) at 25
- Maximum Temperature : 80

### Removal Ratings (µm)

1, 3, 5,..... 100

### Cartridge Dimensions

- In diameter : 113mm
- Out diameter : 150mm
- Length(mm) : 250,500,750,1000

## Ordering Information

Type	Product Name	Micron Rating	End-Cap Option	Length
'D': Depth Filter	'J': Jumbo	'01': 1.0 µm	'A': 250mm D/O	'1': 10"
		'05': 5.0 µm	'B': 254mm D/O	'2': 20"
		'10': 10.0 µm		'3': 30"
		'25': 25.0 µm		'4': 40"
		'50': 50.0 µm		
		'75': 75.0 µm		
		'1 1': 100.0 µm		